

Maneesh Soni,
Systems Manager
ARM® microprocessor group
Texas Instruments

Executive summary

EtherCAT® is among the leading communications standards based on Ethernet that is used increasingly for networking and communications in the industrial or factory environment. The EtherCAT communication technology was invented by Beckhoff Automation in Germany and later standardized by the EtherCAT Technology Group (ETG).

Texas Instruments, Inc. (TI) is the first semiconductor company to license EtherCAT technology. TI has integrated EtherCAT into several Sitara™ processors, including the AM335x ARM® Cortex®-A8 and the AM437x ARM Cortex-A9 devices. To enable EtherCAT, TI has built upon its programmable real-time unit (PRU) technology to create a unified front-end for industrial communications and bring EtherCAT and other industrial standards to its growing platform of ARM-based microprocessors. TI has also brought the software, hardware and tools together to streamline the development of EtherCAT-based products with AM335x ARM MPU devices. Additionally, the industrial grade temperature support and long-term supply guarantee make the AM335x ARM MPU generation a compelling choice for EtherCAT and other industrial networking applications.

The integration of EtherCAT into Sitara processors enables best-in-class functionality at

(Continued)

EtherCAT® on Sitara™ Processors

ultra-low power and significantly lower cost. For example, the Sitara AM335x processor-based integration of EtherCAT meets or exceeds all required features and performance benchmarks, including key EtherCAT features such as distributed clocking and end-to-end latency of less than 700 nanoseconds (ns). In addition to the capabilities of Sitara processors, TI streamlines the development of EtherCAT products by supporting design engineers with a wide range of related software, hardware and development tools.

Introduction to EtherCAT

Overview

EtherCAT (Ethernet for Control Automation Technology) is an emerging real-time industrial Ethernet standard for industrial automation applications, such as input/output (I/O) devices, sensors and programmable logic controllers (PLCs). It was originally developed by Beckhoff Automation GmbH but is now overseen by the EtherCAT Technology Group that was set up to help with proliferation of the EtherCAT standard. Today, there are over 1,900 member companies from 52 countries that create and deploy EtherCAT-compatible products. Ethernet has seen unparalleled adoption in diverse applications, but in industrial environments it is still not efficient enough for small amounts of data exchange, it has low determinism for real-time operation, and it works with only star topology in which the network nodes must be connected through switches. EtherCAT technology adds certain features on Ethernet and enforces certain configurations to make it a very efficient network technology for automation while fully conforming to the Ethernet specifications. The design of EtherCAT enables any standard PC to be used as an EtherCAT master and communicate with EtherCAT slaves, which are specialized devices compliant with the EtherCAT specification. Together, the master and slave EtherCAT devices can be used in all devices in the factory network – automation controllers, operator interfaces, remote input/output units, sensors, actuators, drives and others.

Technology

EtherCAT improves upon traditional Ethernet by implementing “on-the-fly” processing where the nodes in the EtherCAT network read the data from a frame as it passes through. All

EtherCAT frames originate from the EtherCAT master which sends commands and data to the slaves. Any data to be sent back to master is written by the slave into the frame as it passes through.

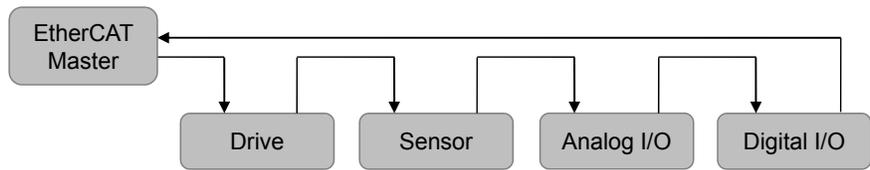


Figure 1. Example EtherCAT network

This helps eliminate the need for point-to-point exchange of small-sized frames between master and individual slaves and drastically improves the efficiency of communication. However, it also means that each slave must have two Ethernet ports and be able to let the frame pass through while reading from or writing to the passing frame and therefore, specialized hardware is required in the slave devices. As a result of these improvements, the usable bandwidth in a 100-Mbps network running EtherCAT is more than 90 percent as compared to less than 5 percent for networks where the master must separately communicate with each slave node.

EtherCAT telegram

As illustrated in Figure 2, the EtherCAT telegram is encapsulated in an Ethernet frame and includes one or more EtherCAT datagrams destined to the EtherCAT slaves. Such Ethernet frames use the EtherCAT type in the header or they can be packed with the IP/UDP header. When the IP header is used, the EtherCAT protocol can also be used across network routers.

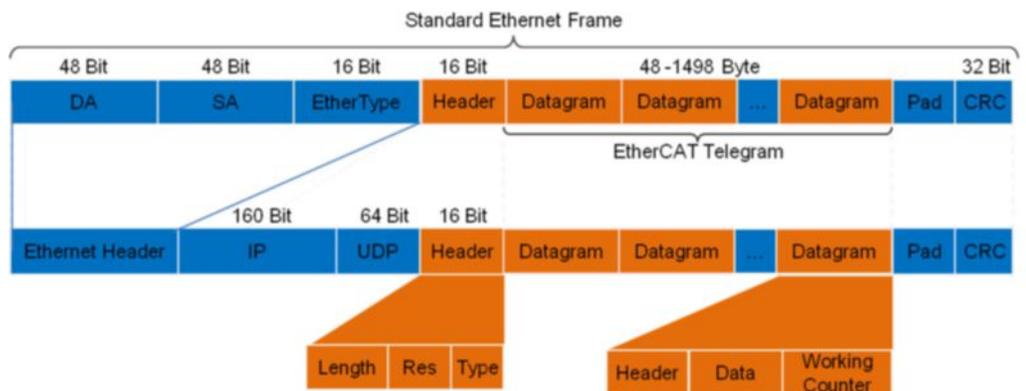


Figure 2. EtherCAT telegram

Each EtherCAT datagram is a command that consists of a header, data and a working counter. The header and data are used to specify the operation that the slave must perform, and the working counter is updated by the slave to let the master to know that a slave has processed the command.

Protocol

Each slave processes EtherCAT packets “on-the-fly” in that it receives the frame, parses it and takes action if the address specified in an EtherCAT datagram matches its own address, and forwards the entire datagram from its second port while also updating the contents and the CRC of the packet. Through the datagrams, the EtherCAT master addresses the entire address space of up to 4 GB in which up to 65,536 EtherCAT slaves, each with 65,536 addresses, can be located. The EtherCAT datagrams do not have any restriction on the order in which the slaves are addressed with respect to the actual position of slave nodes in the network.

There are different types of EtherCAT data transmissions – cyclic and acyclic. Cyclic data are the process data that are transferred at periodic intervals or cycle times. Acyclic data is usually non-time-critical data that can be large in size and usually exchanged in response to a controller command. Some acyclic data, such as diagnostic data, can be critical and have demanding timing requirements. EtherCAT handles these different data transmission requirements through optimized addressing schemes – physical addressing, logical addressing, multiple addressing and broadcast addressing.

To handle various addressing schemes, each slave has a fieldbus memory management unit (FMMU). The FMMU units in each slave enable the EtherCAT protocol to treat various slave devices as part of a 4-GB large memory space with slave spaces mapped in it. The EtherCAT master assembles a complete process image during the initialization phase and then makes even bit-level accesses to slave devices via a single EtherCAT command. This capability makes it possible to communicate practically with any number of input/output (I/O) channels across large and small devices spanning the entire fieldbus network via a standard Ethernet controller and standard Ethernet cable.

Performance

As a result of hardware-based FMMU and on-the-fly processing, the EtherCAT network performs at very high levels of efficiency. It enables cycle times of the order of microseconds to communicate from controllers to field devices. The communication efficiency is no longer a bottleneck in industrial networks and brings it in line with the computation speeds of contemporary industrial PCs. For instance, the increased performance makes it possible to run the current loop, in addition to the position loop, for distributed drives over EtherCAT.

Topology

The EtherCAT standard supports any topology – line, star or tree – and the bus structures common in fieldbus networks can also be realized with EtherCAT. Since the EtherCAT interface is present on I/O devices, there is no requirement for any Ethernet switching hardware. With the 100-m range of copper links and even longer with optical links, EtherCAT can span over thousands of devices spread across a large geographical area. For short distances, such as on back-plane, EtherCAT uses E-bus, a differential signaling technology.

Distributed clocking

To realize simultaneous actions in industrial nodes installed away from each other, it is necessary to synchronize their internal clocks. EtherCAT accomplishes this by sampling the timestamps for the ingress and egress of an EtherCAT packet on every slave node as it traverses the network. The master uses the timestamp information provided by the slaves to accurately calculate the propagation delay for each individual slave. The clocks in each slave node are adjusted based on this calculation and thus, these clocks are synchronized to within 1 μ s of each other. An additional advantage of the accurately synchronized clocks is that any measurements taken can be linked to the synchronized time and remove the uncertainty associated with the jitter in the communication between devices.

Device profiles

In industrial automation, use of device profiles is a very common method to describe the functionality and parameters of the devices. EtherCAT provides interfaces to existing device profiles so that legacy fieldbus devices can be easily upgraded to use EtherCAT. Some of such interfaces are CAN application layer over EtherCAT (CoE) and Servo drive profile over EtherCAT (SoE) that enable use of CANOpen[®] and SERCOS[®] by taking advantage of the mapping of their data structures to EtherCAT.

Components of an EtherCAT node

Each EtherCAT node (Figure 3) has three components – the physical layer, the data link layer and an application layer.

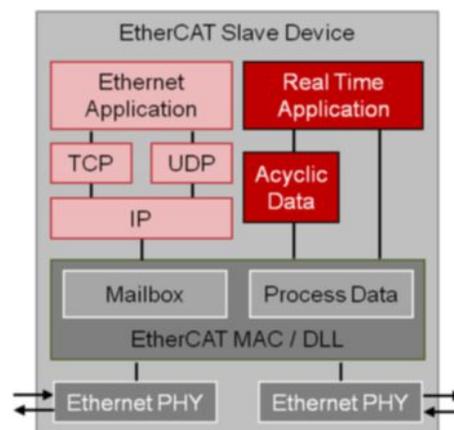


Figure 3. Components of an EtherCAT node

The physical layer is implemented using 100BASE-TX copper, 100BASE-FX optical fiber or E-bus based on LVDS signaling. The MAC is implemented either in a specialized ASIC or an FPGA as per the EtherCAT standard specifications. Beyond the MAC is the industrial application that takes care of application-specific behavior and a standard TCP/IP and UDP/IP stack to support Ethernet-based device profiles. Depending on the complexity of the device, the EtherCAT node can be implemented in hardware or it could be a combination of hardware and software running in an embedded CPU.

Compliance

To ensure broad interoperability among devices designed with EtherCAT interfaces, the EtherCAT Technology Group (ETG) has several programs for ensuring compliance with the technical specifications. These programs include the conformance test tool (CTT), which is a software program for testing compliance; the plug-fests where members can meet and test against one another's devices; and certification labs in Germany and Japan where formal certification tests are performed. To meet minimum conformance requirements a device has to pass the protocol test using the conformance test tool at the time of its first release to the market. Optionally, vendors can choose to get their products certified in any of the authorized certification labs. The ETG website provides detailed information on procedure and location of certification labs.

Typical EtherCAT® node

A typical EtherCAT node that is in use today has architecture similar to one of the illustrations below.

Many of the simple EtherCAT devices such as digital I/O can be created using single FPGA or ASIC solutions available today. A simplified version of such architecture is shown in Figure 4. Such architecture is well suited for cost-sensitive simple I/O nodes that do not require software and all functionality is implemented in hardware.

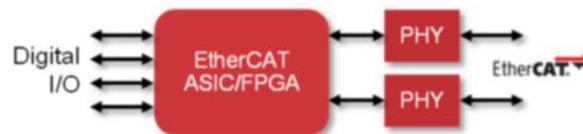


Figure 4. Basic Digital I/O EtherCAT device

In the EtherCAT nodes where additional processing power is needed, an external processor, often with on-chip Flash memory, is connected to the EtherCAT ASIC/FPGA for handling the application-level processing. Such devices could be sensor applications, for instance, where the processor is required to operate the sensor, implement the device driver and run the EtherCAT protocol stack. The cost of such architecture is higher than that for simple digital I/O devices and it comes with the flexibility that developers can select a processor that suits their needs and cost targets.



Figure 5. EtherCAT with ASIC and external processor

In yet another approach, the EtherCAT implementation is one of the peripherals in the device that has an integrated CPU. Many FPGA devices have the capability to configure a processor in the FPGA or already have an integrated processor. Some vendors provide ASICs with both EtherCAT and a suitable processor on

the device. The FPGAs are flexible but depending on the CPU selection, there is a risk that cost or operating frequency targets are challenging to meet.

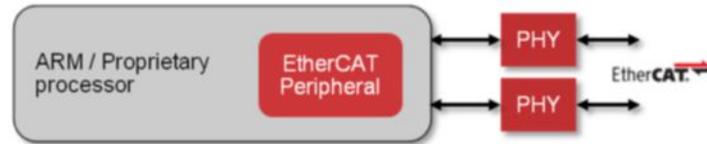


Figure 6. Integrated EtherCAT with processor

EtherCAT solution from TI

TI has integrated EtherCAT functionality into the Sitara AM335x ARM Cortex-A8 and AM437x Cortex-A9 processors. These devices integrate an ARM processing core with a slew of other peripherals and interfaces that make them attractive devices for building industrial automation equipment.

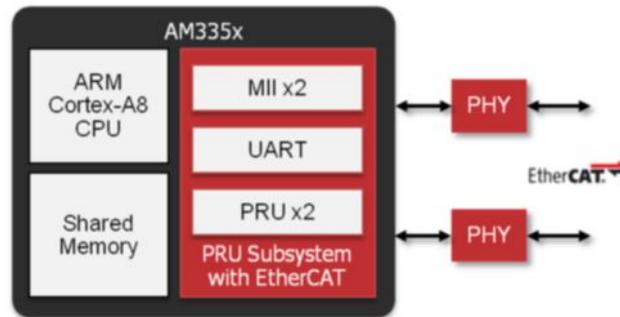



Figure 7. EtherCAT slave on TI Sitara AM335x / AM437x processors

The Sitara AM335x and AM437x processors integrate the programmable real-time unit (PRU) subsystem, which supports very low-level interaction with the MII interfaces. This capability enables the PRU subsystem to implement specialized communication protocols such as EtherCAT. The entire EtherCAT MAC layer can be encapsulated in the PRU subsystem through firmware. The PRU processes EtherCAT telegrams on-the-fly, parses them, decodes the address and executes EtherCAT commands. Interrupts are used for any communication required with the ARM processor where the EtherCAT stack (Layer 7) and the industrial application is running. The PRU subsystem also performs frame forwarding in the reverse direction. Since the PRU subsystem can implement all EtherCAT functionality, the ARM processor can be utilized for complex applications or a lower-speed ARM core can be deployed for simpler and cost-constrained applications, such as distributed I/O.

To complete the EtherCAT solution with the Sitara AM335x and AM437x processors, Ethernet PHY devices such as TI's TLK105L, TLK106L, DP836X0 or DP8384x are required. For instance TLK110 is optimized for low latency between the MII and PHY interfaces, which is an important attribute for EtherCAT performance. The TLK110 also has advanced cable diagnostics features that can quickly locate cable faults.

Sitara processors block diagram

The Sitara AM335x and AM437x processors are low-power devices based on the ARM Cortex-A8 and ARM Cortex-A9 RISC cores, respectively. Both processors feature a broad range of integrated peripherals. For industrial applications, the Sitara processors support multiple operating frequency ranges from 300 MHz for simple applications up to 1 GHz for complex applications that require high performance, such as industrial drives. Both the AM335x and AM437x processors at any performance level can implement EtherCAT. The AM335x processor is configured with one PRU coprocessor (two real-time cores) while the AM437x processor features two PRUs with a total of four real-time cores. The block diagrams of the Sitara AM335x and AM437x processors are shown in Figures 8 and 9 below. Additional information about both devices, their on-chip peripherals and features is available at www.ti.com/am335x or www.ti.com/am437x.

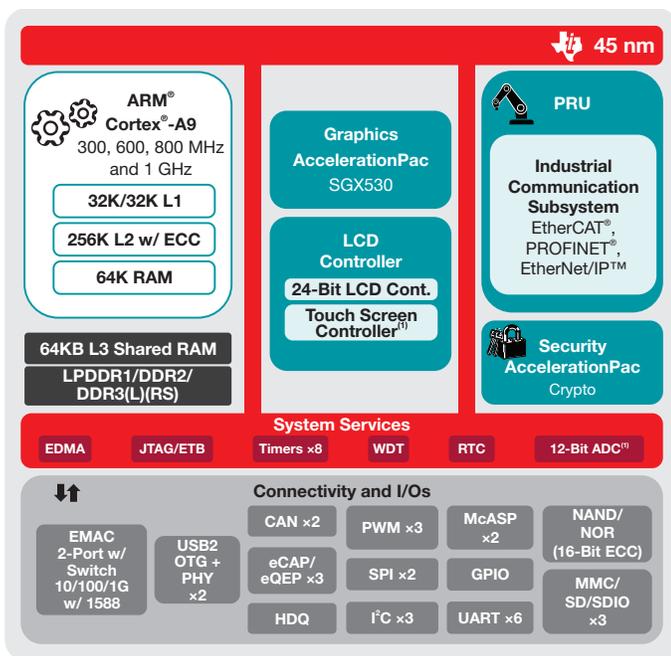

* 800 MHz / 1 GHz only available on 15x15 package. 13x13 supports up to 600 MHz.

(1) Use of TSC will limit available ADC channels.

Figure 8. AM335x processor block diagram

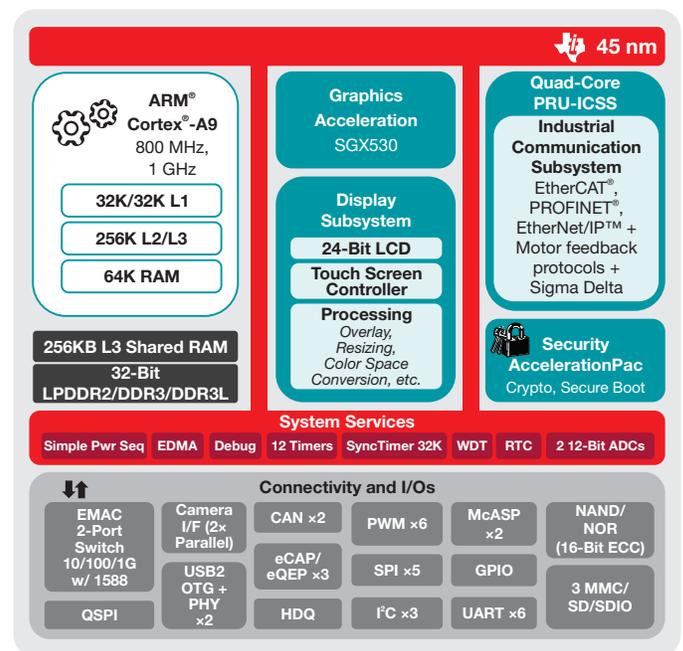


Figure 9: AM437x Sitara processor block diagram

EtherCAT software architecture

Three major software components comprise an EtherCAT slave implementation on one of TI's Sitara processors. The first is the micro-code that implements Layer 2 functionality in the PRU; the second is the EtherCAT slave stack that runs on the ARM processor and the third is an industrial application that is dependent on the end equipment in which this solution is used. Additional supporting components, such as the protocol adaptation layer and device drivers are provided by TI in the software development kit. Irrespective of whether a TI-tested EtherCAT stack is used or another, the architecture illustrated in Figure 10 on the following page is designed to work without changes. This EtherCAT solution is also independent of the OS and any adaptations can be made by referring to the PRU subsystem firmware API guides.

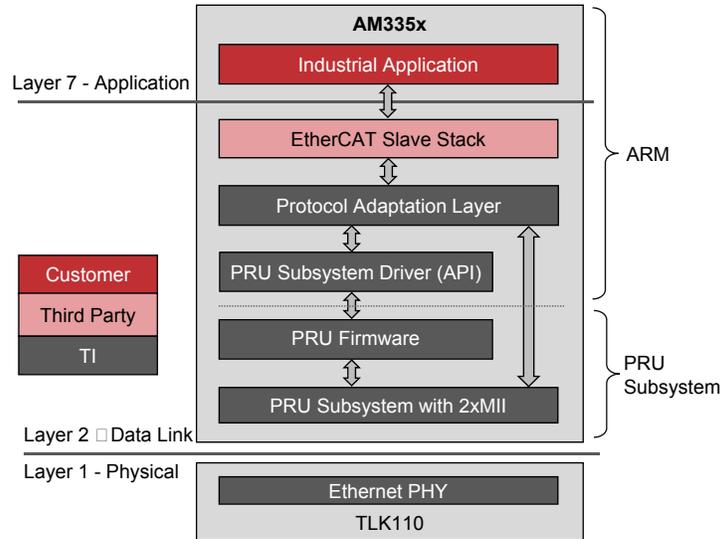


Figure 10. Software architecture for EtherCAT slave

In EtherCAT Layer 2, the PRU real-time cores share the tasks of datagram processing, distributed clocking, address mapping, error detection and handling and host interface.

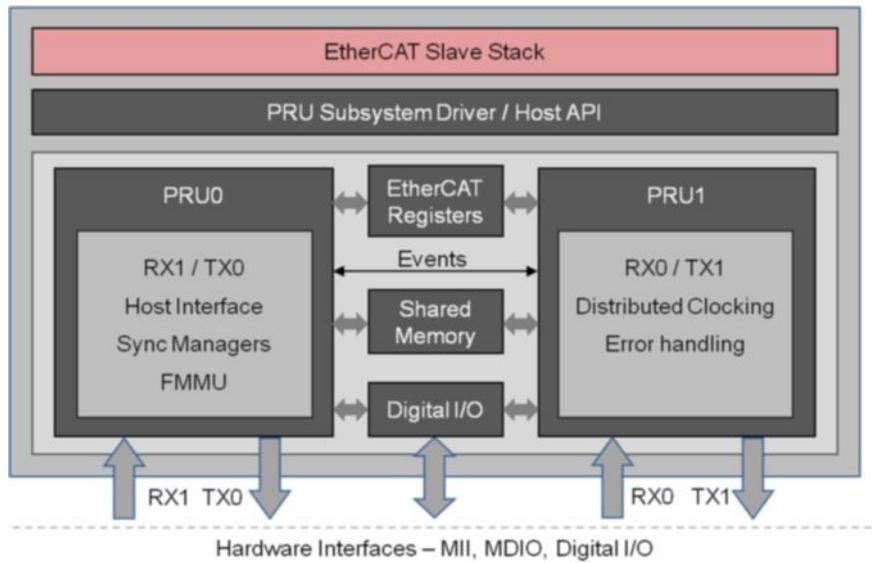


Figure 11. EtherCAT firmware architecture

PRUs also emulate EtherCAT register space in the internal shared memory. With their deterministic real-time processing capability, the PRUs handle EtherCAT datagrams with consistent and predictable processing latency. The AM335x or AM437x processors with TI's TLK110 Ethernet PHY device exhibits a low latency which makes TI's implementation one of the leading EtherCAT slave solutions.

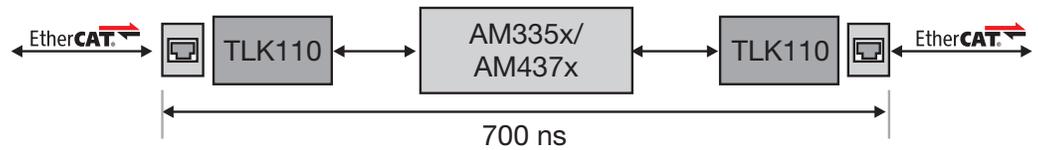


Figure 12. EtherCAT RX-TX latency

Key EtherCAT parameters

The key attributes of an EtherCAT slave implementation on the Sitara AM335x and AM437x processors are provided below.

Attribute	AM335x processor	AM437x processor
Number of ports	2 MII ports	2 MII ports
E-bus support	No. E-bus is proprietary	No. E-bus is proprietary
FMMUs	Up to 8	Up to 8
Sync managers	Up to 8 (Buffered/Mailbox)	Up to 8 (Buffered/Mailbox)
Timer	64 bit (32-bit HW, 32-bit SW)	64 bit (32-bit HW, 32-bit SW)
Distributed clocks	Yes (<< 1 μ s) Sync0/1	Yes (<< 1 μ s) Sync0/1
Sync/Latch signals	SYNCO/1, LATCHO/1	SYNCO/1, LATCHO/1
Host interface	Integrated ARM Cortex-A8 SPI interface available	Integrated ARM Cortex-A9 SPI interface available
Process data I/F	12 KB on-chip shared RAM 8 KB used for PD	32 KB on-chip shared RAM 28 KB used for PD
Bitwise operations	Supported	Supported
Digital I/O	Many chip-level GPIOs	Many chip-level GPIOs
Package	PBGA 324, 15 \times 15mm	NFBGA 491, 17 \times 17mm

Table 1: Key attributes of an EtherCAT slave implementation on Sitara processors

Easy EtherCAT integration

TI has streamlined the process of integrating EtherCAT with the Sitara AM335x or AM437x processors. All the tools and software code required to integrate EtherCAT slaves are available as part of these processors' software development kits (SDK). On each development platform, the SDK includes firmware for the EtherCAT protocol, software drivers, hardware initialization routines, adaptation layer for the stack API, EtherCAT protocol stack and the application itself. The supporting documentation with the SDK enables one to modify and build new features into the application.

To facilitate the integration of the EtherCAT protocol stack, TI has also closely collaborated with Beckhoff Automation to validate EtherCAT Slave Stack Code on the Sitara processors. The Beckhoff code has been adapted to work on the Sitara processors and it has been tested to ensure that the integration is seamless for customers. Customers are expected to become ETG members (required to market EtherCAT products) and get entitled to obtain a free copy of the Beckhoff stack directly via the ETG website before taking their product to market. A copy of the EtherCAT stack from Beckhoff is also included in the TI Industrial SDK for evaluation, development and test purposes.

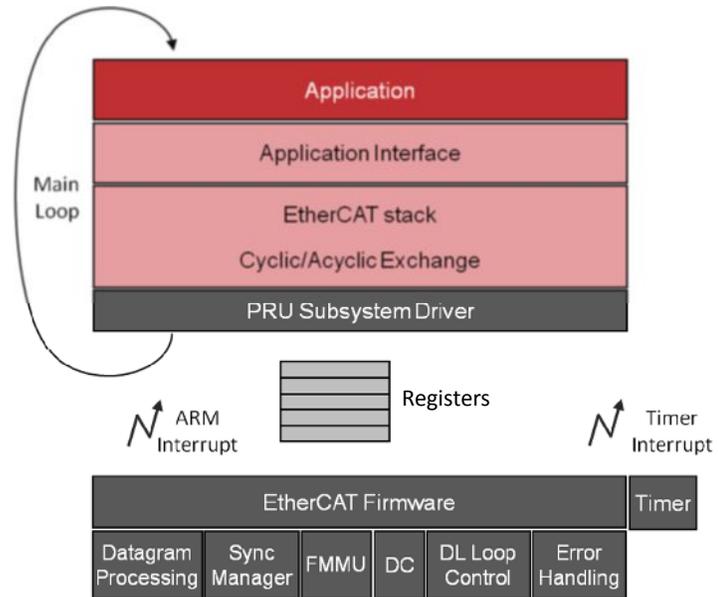


Figure 13. EtherCAT software integration

For a typical use case, the EtherCAT firmware, the stack, the drivers and the high-level operating system (if needed) or a real-time OS kernel are all reused from the respective software development kit. There is usually only one file to be modified by the user when the user application is being developed.

Power consumption

EtherCAT implementations on Sitara devices benefit from a low-power ARM core and system architecture, which eliminates the need for a fan or heat sink. For instance, in most use cases, the peak power of the AM335x processor is under 1 W. For EtherCAT applications, the power consumption is less than 1 mW per MHz of ARM CPU speed.

Integrating EtherCAT on end products

In order to integrate EtherCAT slave into industrial equipment, customers can use TI's EtherCAT slave implementation and complete their design process using the evaluation copy of the EtherCAT Slave Stack Code provided in the SDK. The Slave Stack Code is originally obtained from Beckhoff and it is available to all ETG members for no charge. Customers can also use a slave stack from a different vendor or develop their own. The customer should use Conformance Test Tool to pass all tests. Optionally, they can then get the product certified by EtherCAT certification labs and may also perform broader interoperability tests at the EtherCAT plug fests.

Devices for EtherCAT implementation

TI provides several Sitara processors for EtherCAT implementations, as well as complementary analog products for the signal chain and power circuitry. A brief description of these products is provided in Table 2

below. These products are available in industrial grade temperature range and have long-term availability.

Product	Description
AM335x	ARM® Cortex™-A8 32-bit microprocessor available in two speed grades. Integrated EtherCAT® slave/master and several other industrial Ethernet standards. Integrated fieldbus standards such as PROFIBUS® and CANopen®.
AM3517	ARM Cortex-A8 microprocessor for EtherCAT master applications
AM437x	ARM Cortex-A9 32-bit processor available in speed grades up to 1 GHz. Integrated EtherCAT slave/master
TLK110	Ethernet PHY optimized for high-performance industrial Ethernet such as EtherCAT
TPS65910	Advanced low-footprint power management solution for AM335x microprocessors

Table 2: TI EtherCAT devices

Development tools for EtherCAT implementation

TI provides Evaluation Module (EVM) development platforms for its Sitara processors with comprehensive design data to assist customers with their implementations. All design data for these EVMs such as schematics and layout is available for accelerating development of customer designs. For more information on the tools available for specific processors, [click here](#).

In addition, TI also collaborates with external vendors for an additional development platform targeted for industrial applications.

Summary

TI offers integrated EtherCAT slave and master capability on Sitara processors targeted for industrial I/O, sensor, PLC and human machine interface (HMI) systems. The integration of EtherCAT with a powerful yet low-power ARM core results in lower-cost end products without compromise on the functional or operational requirements. TI also offers the transceivers with built-in isolation for the industrial communication interfaces such as EtherCAT, PROFIBUS, CAN, RS-485 and more. With comprehensive software and hardware development tools, worldwide support and an active E2E™ developer community, customers can look forward to greatly simplified EtherCAT integration with the added benefit of significant cost savings – as much as 30 percent!

Important Notice: The products and services of Texas Instruments Incorporated and its subsidiaries described herein are sold subject to TI's standard terms and conditions of sale. Customers are advised to obtain the most current and complete information about TI products and services before placing orders. TI assumes no liability for applications assistance, customer's applications or product designs, software performance, or infringement of patents. The publication of information regarding any other company's products or services does not constitute TI's approval, warranty or endorsement thereof.

e2e and Sitara are trademarks of Texas Instruments Incorporated. All other trademarks are the property of their respective owners.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Applications Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community

e2e.ti.com